

PB1-1025-10

1-1025 MHz – 10W

Solid State Broadband High Power Amplifier

The PB1-1025-10 is a 10W, Class A linear laboratory bench top amplifier for the 1 - 1025 MHz band. It offers superior performance with high gain and power in a small enclosure using advanced broadband matching techniques and the finest Gold MOSFET transistors available on the market today. Matched for 50 ohms input and output, the PB1-1025-10 provides a minimum of 10 watts P1dB making it the natural choice for broadband testing.



Specifications (@ 25°C ambient air)				
Parameter	Min.	Typ.	Max.	Units
Frequency	1		1025	MHz
Pout CW P1dB	9	11		Watts
Power in		-2.5		dBm
Gain	40	42		dB
Gain flatness		±1.5		dB
Input R/L			-14	dB
2 nd Harmonic	See 5 & 10 watt graph page 3			
3 rd Harmonic	See 5 & 10 watt graph page 3			
Electrical supply	88 ~ 132VAC or 176 ~ 264VAC, single Ø, 47-63Hz			
AC Current (approximate)	1.5 A @ 120VAC, 0.5 @ 208VAC			
Dimensions	8.0"W x 12.0"L x 5.0"H 203.3mm x 304.8mm x 127mm			
Connectors	RF In & RF Out SMA			

Features

- 10 Watts P1dB Class A
- 50 ohms input/output
- Bandwidth 1 – 1025 MHz
- Internal cooling
- Over Temperature Protected ⁽¹⁾
- Easy access fuse
- Small Size
- Low Power Consumption
- On/Off Switch, LED display
- 88-132VAC or 176-264VAC supply (factory set)

RF Maximum Ratings	
Parameter	Units
Load Mismatch (for 2 seconds)	10:1
Storage Temp	-40° - +105°C
Ambient Op. Temp.	0°C - +55°C

Power Module Technology • 3107 N. Deer Run Road, Suite 20, Carson City, Nevada 89701 USA.


Tel: +1.775.883.1122 e-mail: sales@pmtrf.com web: <http://www.pmtrf.com>

Specifications contained herein are subject to change without notice.


PMT assumes no liability for the use of this information.

© PMT 2008

PB1-1025-10 Gain

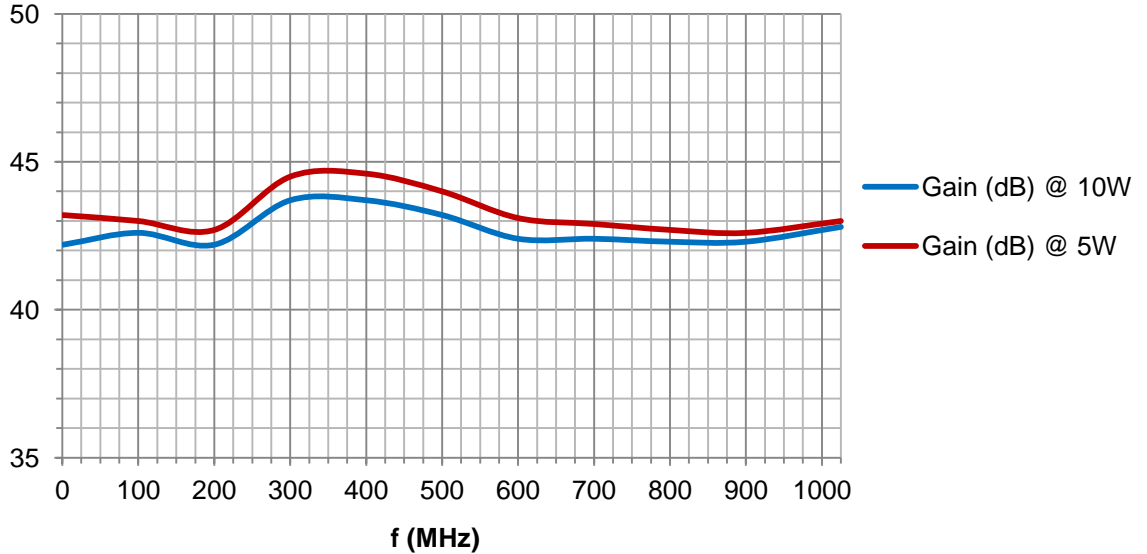

PB1-1025-10 Harmonics

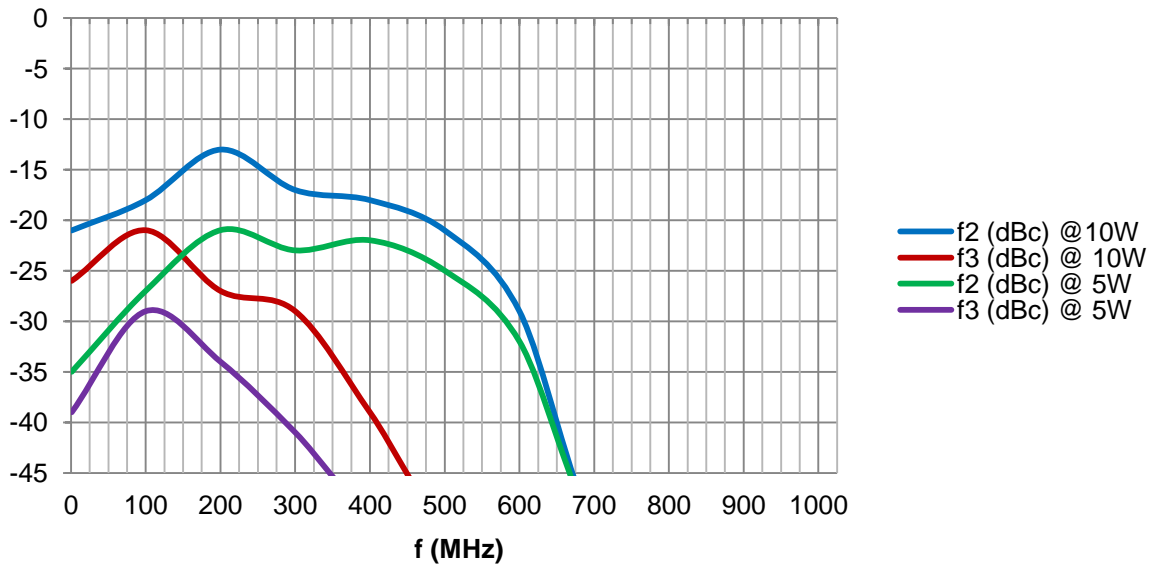

Power Module Technology • 3107 N. Deer Run Road, Suite 20, Carson City, Nevada 89701 USA.


Tel: +1.775.883.1122 e-mail: sales@pmtrf.com web: <http://www.pmtrf.com>

Specifications contained herein are subject to change without notice.


PMT assumes no liability for the use of this information.

© PMT 2008

PB1-1025-10 Gain

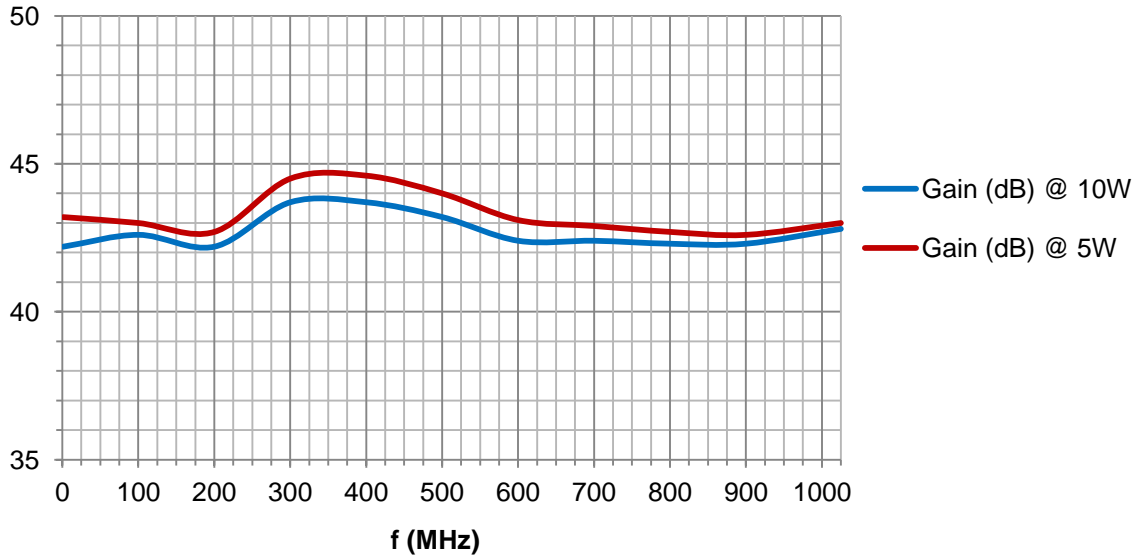

PB1-1025-10 Harmonics

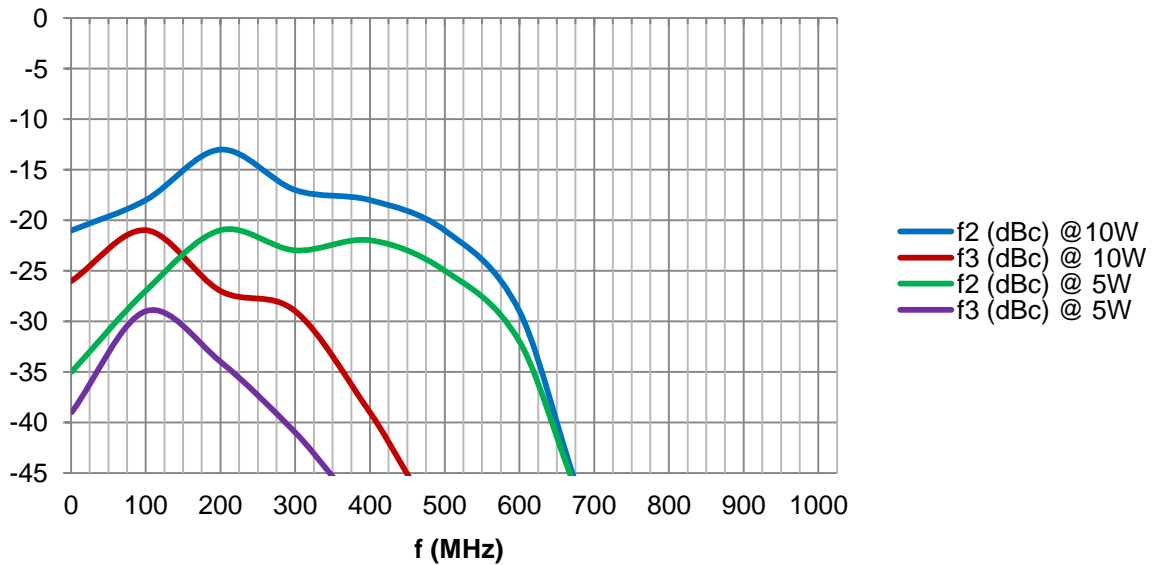

Power Module Technology • 3107 N. Deer Run Road, Suite 20, Carson City, Nevada 89701 USA.

Tel: +1.775.883.1122 e-mail: sales@pmtrf.com web: <http://www.pmtrf.com>

Specifications contained herein are subject to change without notice.

PMT assumes no liability for the use of this information.

© PMT 2008



Front View



Rear View

Notes:

1. Should overheating occur, the amplifier will automatically shut down. Immediately switch the AC power off and determine if the ambient air temperature is too high or if the amplifier should be returned for repair. Failure to switch the AC power off under automatic shut down will cause the amplifier to cycle on and off with temperature.

Power Module Technology • 3107 N. Deer Run Road, Suite 20, Carson City, Nevada 89701 USA.

Tel: +1.775.883.1122 e-mail: sales@pmtrf.com web: <http://www.pmtrf.com>

Specifications contained herein are subject to change without notice.

PMT assumes no liability for the use of this information.

© PMT 2008



PB1-1025-10
1-1025 MHz – 10W
Solid State Broadband
High Power Amplifier

Revision History:

08-30-11

Data Sheet

We Listen to your comments

If there is any information within this document that you feel is wrong, unclear or Missing, please give us your feedback as it will help us to continuously improve The quality of this document. Please send your suggestions (including a reference To this document) to:

Bob.Todd@PMTRF.com

To request other information please call 1-775-883-1122

Attention please:

The information herein is given to describe certain components and shall not be Considered as a guarantee of characteristics. Terms of delivery and rights to Technical change reserved.

For further information on technology, delivery terms, conditions and prices, please Contact the sales department at PMT headquarters at 1-775-883-1122

Power Module Technology • 3107 N. Deer Run Road, Suite 20, Carson City, Nevada 89701 USA.

Tel: +1.775.883.1122 e-mail: sales@pmtrf.com web: <http://www.pmtrf.com>

Specifications contained herein are subject to change without notice.

PMT assumes no liability for the use of this information.

© PMT 2008